

DIGITAL GAUGE TIRE INFLATOR

MODEL 10961

ESCO®



PSI
BAR
KPA
KGF

PRO
SERIES

**NEW
DESIGN**

MODEL 10961
COMMERCIAL-GRADE
RECHARGABLE UNIT

Designed with a ceramic sensor designed to provide the most accurate, durable, and reliable pressure measurements, enhancing tire safety and performance.



BENEFITS & FEATURES:

- **NEW** Ceramic sensor delivers exceptional accuracy within ± 1 psi for pressures ranging from 25-75 psi.
- Features a high-contrast VA LCD display, enhancing visibility with a black background and white text.
- Versatile multi-scale pressure gauge.
- Constructed from durable diecast aluminum internally, with a lightweight composite exterior.
- Surpasses EC Standards for accuracy.
- Includes calibration certificate.

INFLATION SOLUTIONS


Scan to learn more about other inflation solutions available from ESCO.



Specifications:

MODEL 10961

Introducing the **ESCO PRO-SERIES DIGITAL TIRE INFLATOR V3 (MODEL 10961)** features a rechargeable 60-hour lithium-ion battery, an advanced ceramic sensor for precise inflation, and a clear VA LCD screen. Designed for both professionals and hobbyists, this durable inflator reduces tire wear and improves safety. Invest in accuracy and reliability with ESCO.

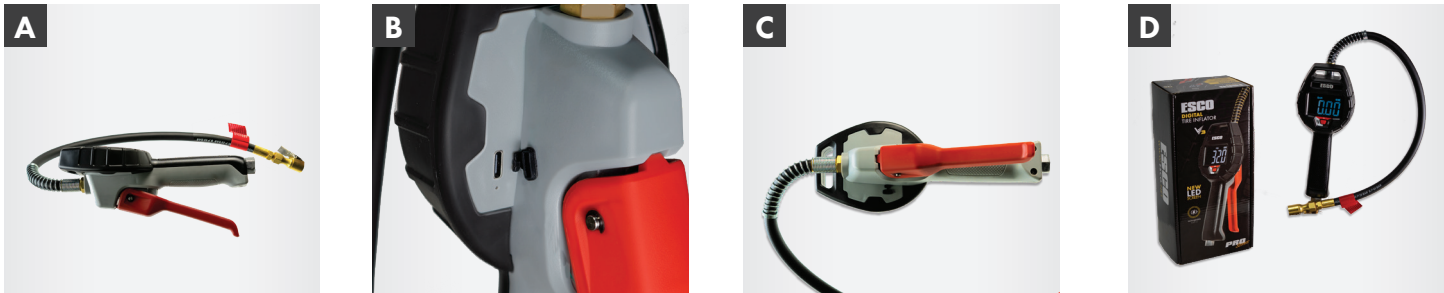

(A) The hose is reinforced with a wire sheath to prevent kinks and an impact-resistant bumper for added durability. **(B)** Equipped with a 1200 mAh lithium-ion phosphate battery, complete with a USB-C charging cable. **(C)** Designed with easy to use and ergonomically designed handle for easy inflation and deflation with the touch of a trigger. Once unit is connected to air and is attached, the unit will power on automatically. **(D)** Retail ready packaging.



Model #	10961
Description	Digital Gauge Tire Inflator
Reader Unit	Digital
Chuck Type	Clip On
Chuck Style	Single Straight
Scale	0-174 psi, 1-12bar
Inlet Size	1/4" NPT Female
Hose Length	20 in. 500mm with Swivel
Dimensions (L x W x H)	11 (L) x 6 (W) x 4 (H) in. 279 x 152 x 101mm
Weight	1.87 lbs. 0.85 kg
Reading Accuracy	± 1.0 psi @ 25-75 psi
Operation	Inflate, Deflate, Measure
Supply Pressure Max.	200 psi 1375 kPa
Advised Application	Industrial, Workshops
Inflation Flow	42 cfm (1200L/min) @ 200 psi
Power Source	1200 mAh lithium-ion phosphate battery*
Battery Life	60 hours
Auto Off	90 seconds
IP Rating	IP44
Warranty	1-Year
UPC	816904024505

*USB-C technology fast charging connection.

NOTE: ESCO reserves the right to change, alter, or modify product(s) without notice. This includes but is not limited to product: color, design, parts, accessories, etc.



website

SALES@ESCO.NET WWW.ESCO.NET 1.800.352.9852



COPYRIGHT 2024 • 15270 Flight Path Drive • Brooksville, FL 34604

