

RingMaster - O-Ring/Lock Ring Installer

**RING
MASTER**




MODEL 70162

- ➊ **Adjustable Arms Push Against Rim**
- ➋ **Adjustable Feet - To Fit Width of the Rim**
- ➌ **Stacker Pieces - To adjust Area of Extension**
- ➍ **Easy Action Rotating Arm - For Lock Ring Removal**

- ▶ Lightweight and Easy to Use
- ▶ Pushes & Holds Rim Flange/Tire Back for Easy O-Ring/Lock Ring Installation
- ▶ Portable- Fits in Tire Truck Tool Box. Eliminates use of Boom Crane & Cumbersome Tire Tools
- ▶ Easy One Man Operation
- ▶ Works on all 3 Piece & 5 Piece Rim/Wheels up to 39" in Diameter (See Model Specs Below)
- ▶ Eliminates Danger of Pushing Equipment Off Jack with Crane.



Point.Scan.Explore.

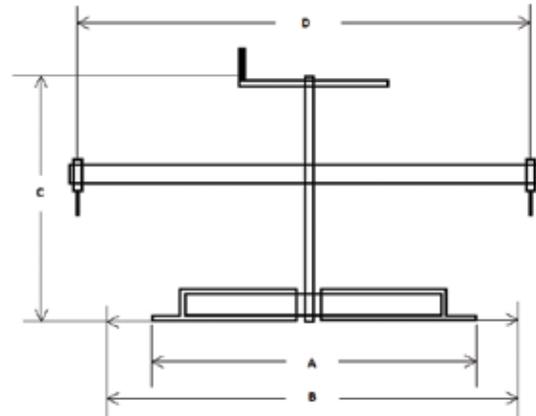

	A	B	C	D	Weight
MODEL #70162	22.25 in 565 mm	32 in 813 mm	18 in 457 mm	28 in 711 mm	22 lbs. 10 kg

RingMaster - For Extended Planetary Flange Wheels



MODEL 70162K
(INCLUDES MODEL 70163)



MODEL 70163
For 24" Through 29"

