

Operating Instructions

Static Discharge Reel

Model Number:

GA3100 N

GHC3100 N



Dimensions

	GA3100 N	GHC3100 N
A	9.25"	9.25"
B	4.31"	5.33"
C	9.75"	9.75"



WARNING!

Grounding plugs / clamps shall not be allowed to drag across ramp.

Clamps / plugs shall be carried to reels on equipment.

GA3100 N Only - Replace cable with 100' maximum 3/32" x 5/32" grounding cable, with maximum coating OD of 1/8". Pre-wind the reel 54 to 55 full turns clockwise. Attach cable and allow it to slowly retract into the reel. Do not operate this product without the appropriate pre-wind on the reel. Over pre-winding or under pre-winding of the reel may damage the power spring.



Failure to follow the above warnings may cause personal injury and damage to the reel.

INSTALLATION

⚠ CAUTION

Be sure reel base is securely grounded to mounting surface. Check for continuity following installation. On painted surfaces, remove paint at bolt location, use external tooth lockwashers or run ground wire from reel base to grounded object. Failure to ground will prevent reel from performing its intended function and could result in personal injury.

Mount reel to grounded, metal surface using four holes in mounting base. To minimize wear on cable and cable guide, reel should be mounted in direct line with work so that cable is pulled out as straight as possible during use. See figures 1 & 2.

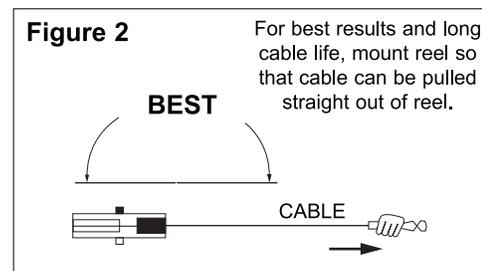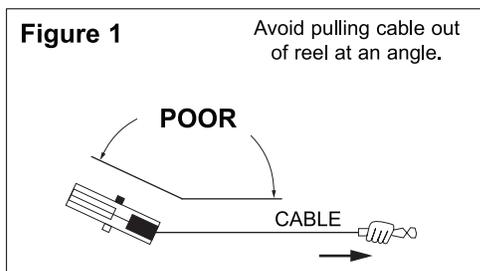

Rev: 7/2024