

# TWO POST LIFT RED 10

# **AUTOMOTIVE AND LIGHT TRUCK GENERAL SERVICE**

DESIGNED IN ITALY, AND USED BY THE WORLD'S PREMIUM CAR MANUFACTURERS


# **RED 10**

DUAL METRIC 10,000 LB./4.5T CAPACITY


DIRECT-DRIVE DUAL METRIC OVERHEAD COMMERCIAL GRADE TWO POST LIFT



## **FEATURES**



3 Stage Front Arm Configuration



3 Stage Rear Arm Configuration



Truck adapter kit (3) lift pad extender heights 1.5 in., 3 in., 6 in.

# RED 10

# 10,000 LB./4.5T CAPACITY

## AT OMER USA, OUR GOAL IS TO BUILD LIFTS THAT LAST LONGER, PERFORM BETTER, AND COST LESS TO OPERATE.


| SPECIFICATIONS                                 |                                  |
|--|----------------------------------|
| Capacity                                       | 10,000 LB. / 4.5T                |
| Max Rise from the ground                       | 72.75" / 1848mm                  |
| Lowest Clearance from the ground               | 4.05" / 103mm                    |
| Narrow Drive-Thru Clearance                    | 88.15" / 2239mm                  |
| Narrow Overall Width                           | 140.43" / 3567mm                 |
| Narrow Width Inside of Columns                 | 111.42" / 2830mm                 |
| Wide Drive-Thru Clearance                      | 99.96" / 2539mm                  |
| Medium Width Inside of Columns                 | 117.32" / 2980mm                 |
| Wide Width Inside of Columns                   | 123.23" / 3130mm                 |
| Front Arm Reach                                | 19.3" - 41.85"<br>492mm - 1063mm |
| Rear Arm Reach                                 | 37.3" - 60.20"<br>948mm - 1529mm |
| Standard Overall Height                        | 143.7" / 3650mm                  |
| Tall Overall Optional Height - not included    | 166" / 4235mm                    |
| Tall Ceiling Height Requirements - not incuded | 168" / 4267mm                    |
| Width Arms Open Symmetric Setting              | 122.09" / 3101mm                 |
| Widht Arms Asymmetric Setting                  | 34.45" / 875mm                   |

#### **FEATURES**

- OMER two post lifts are powered by twin direct-drive cylinders, one in each column to drive the carriages and lift vehicles. OMER's Direct-Drive two post car lift technology eliminates the need for lifting chains or screw mechanisms most commonly found on other lift designs. Dual HVLP low-pressure cylinders minimize leakage and offer better reliability, smoother operation and fewer maintenance costs. High Volume and Low Pressure equates to less workload placed on the entire hydraulic system. Direct-Drive technology is preferred, as it has fewer moving parts.
- DualMetric design provides both space-saving asymmetric lift capabilities for maximum drive-thru clearance with minimal footprint.
- 3-stage front arms provide greater overall arm sweep and greater lifting flexibility.
- Front arms articulate a full 180 degrees, providing maximum extension and retraction ensuring safe and reliable lifting.
- DualMetric design provides both space-saving asymmetric lift capabilities for maximum drive-thru clearance with minimal footprint.
- Triple telescoping arm design allows for fast and easy spotting of vehicle, with superior vehicle protection.

- Low profile arms provide greater clearance for vehicle panels and low ground effects.
- Automatic arm restraints allow to easily position arms while lift arms are lower to the ground.
- Single point lock release system safely allows for disengagement of both columns simultaneously.
- Automatic engaging carriage locks prevents unintentional lowering of carriages, which could result in injury.
- Oversized 57" tall lifting carriages offers superior strength and capacity.
- Chrome plated cylinder rods and pistons inhibit rust and provide long-lasting durability.
- Steel aircraft quality equalizing cable sensure the swing arms are level and the vehicle is lifted evenly.
- Space-saving lift design for minimal and maximum footprint for drive-thru clearance.
- Adapters designed to facilitate lifting of larger and wider truck frames are included.
- ALI Certified.

#### **EQUIPMENT DIMENSIONS**

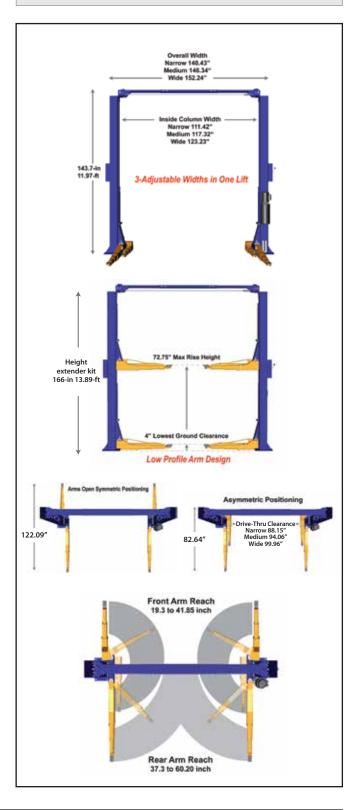

### **OPTIONAL ACCESSORIES**

24" Height Extender Kit

