

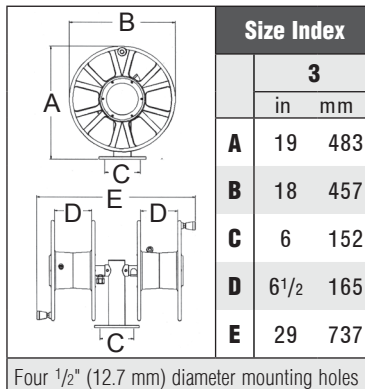


Hand Crank Welding Cable Reels

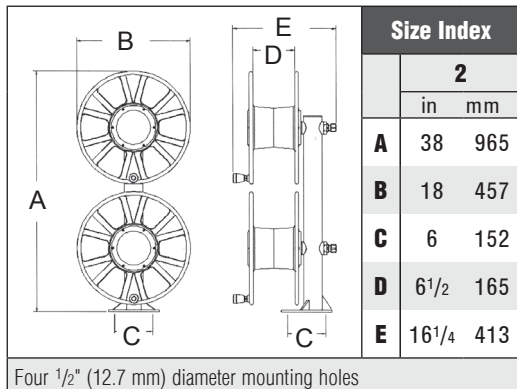

Up to 200' of 2/0 cable

- Designed for manual winding of welding cable
- Ideal for applications where space, weight, and flexibility are key
- Offer trouble-free management of large capacities of cable
- Glass-filled nylon spools are very strong and durable while ensuring that no conductivity occurs
- A substantial welded aluminum base is used to support the weight of the spool
- Oversized bearings – heavy duty shaft with tapered roller bearings offer high rigidity and spool support

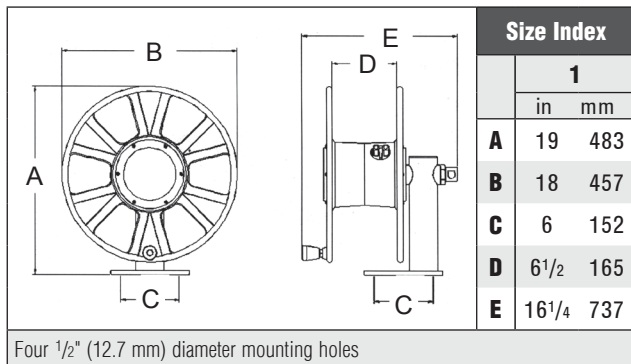

Side-by-side combinations
T-2462-0



Stacked combinations
T-2464-0



Single welding
T-1460-0

Model without cable	Cable Size						Volts	Amps	Shipping Weight		Size Index #
	#1 (42 mm ²)		1/0 (54 mm ²)		2/0 (67 mm ²)				lbs	kg	
	ft	m	ft	m	ft	m					
Single Welding Cable											
T-1460-0	250	76	200	61	175	53	600	300	32	15	1
Dual Side-by-Side Welding Cable (2)											
T-2462-0	250	76	200	61	175	53	600	250	51	23	3
Dual Stacked Welding Cable (2)											
T-2464-0	250	76	200	61	175	53	600	250	62	28	2
For indoor non-weathertight applications only.											



Interactive Reel Catalog

Visit reelcraft.com/catalog for complete product specifications, parts, and accessories.