

Twin Hose, Spring Retractable Reels Dual Hydraulic - 1/4", 3/8", 1/2" I.D.


- Used for medium pressure, dual hydraulic hose applications
- Ideal for operating hydraulic cylinders, tools, and equipment
- Incorporates contemporary engineering and manufacturing techniques to give a trouble-free performance
- Declutching arbor virtually eliminates the possibility of spring damage due to reverse winding
- Constant tension or pos-i-latch spool mechanism
- Hose specifications - polyester elastomer tube with proprietary polyurethane blend, perforated black cover
- Individually powder coated components offer the maximum protection from premature corrosion
- All-steel construction and compact for applications with critical space requirement




TH88050 OMP



THA7630 OMP

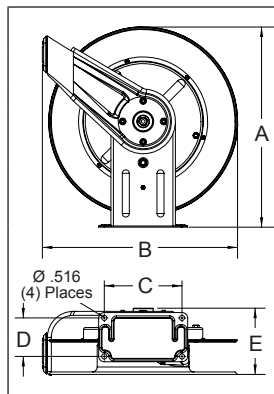

	Size Index			
	1		2	
	in	mm	in	mm
A	20 ¹ / ₄	514	20 ¹ / ₄	514
B	19 ³ / ₄	502	19 ³ / ₄	502
C	7 ⁷ / ₈	200	7 ⁷ / ₈	200
D	3 ⁷ / ₈	98	3 ⁷ / ₈	98
E	7 ³ / ₄	197	8 ¹ / ₂	216

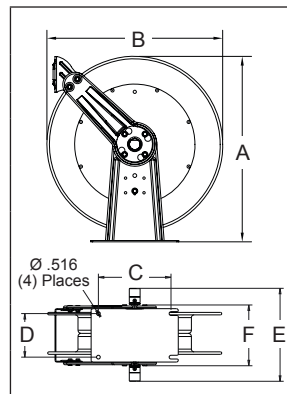

	Size Index	
	3	
	in	mm
A	25 ³ / ₈	645
B	24	610
C	10	254
D	6	152
E	12 ⁷ / ₈	327
F	8 ¹ / ₈	206

Meets or exceeds
military vibration
for Truck
Transport test
MIL-STD-810F
500,000 mile
equivalent

TH5400 OMP not included

Model with hose & bumper	Shipping Weight		Hose I.D.		Hose O.D.		Hose Length		Max Pressure		NPT(M) Hose Outlet	NPT(F) Reel Inlet	Reel Outlet	Size Index #
	lbs	kg	in	mm	in	mm	ft	m	psi	bar	in	in	in	
Medium Pressure Hydraulic Reels Maximum Temperature 210 °F (99 °C)														
THA7630 OMP	53	24	3/8	6	.660	17	30	9	2000	138	3/8	3/8	9/16-18 JIC(M)	1
TH86050 OMP	99	45	3/8	10	.710	18	50	15	2000	138	3/8	3/8	3/8 NPT(F)	3
THA7825 OMP	57	26	1/2	13	.850	22	25	8	2000	138	3/4 JIC(F)	1/2	3/4 JIC(M)	1
TH88050 OMP ★	104	47	1/2	13	.850	22	50	15	2000	138	1/2	1/2	1/2" NPT(F)	3

Models with a ★ icon
are our most popular
models.

Model without hose & bumper	Shipping Weight		Hose Capacity						Max Pressure	NPT(F) Reel Inlet	Reel Outlet	Size Index #	
			I.D.		O.D.		Length						
	lbs	kg	in	mm	in	mm	ft	m	psi	bar	in	in	
Medium Pressure Hydraulic Reels Maximum Temperature 210 °F (99 °C)													
TH5400 OMP	24	11	1/4	6	.530	13	25	8	3000	207	1/4	1/4 NPT(F)	*
THA7600 OMP	44	20	3/8	10	.660	17	30	9	3000	207	3/8	9/16-18 JIC(M)	1
THA7800 OMP	50	23	1/2	13	.850	22	25	8	3000	207	1/2	3/4 JIC(M)	1
TH88000 OMP ★	88	40	1/2	13	.850	22	50	15	3000	207	1/2	1/2" NPT(F)	3
*See page 10 size index 1													

*See page 10 size index 1

**Interactive
Reel Catalog**

Visit reelcraft.com/catalog
for complete product
specifications, parts, and
accessories.

**Pivot Bases &
Swing Brackets**
See page 39